




PermaFlo® Rigid Polyester

A unique alternative to hogs hair. Available in 15"x24" or 20"x25" pre-cut pads or rolls. Rigid construction needs no frame. Cleans easily with water, fibers unaffected by moisture. Safe to handle, no fiberglass, sharp edges, flaking or shedding. Bi-directional air flow. Can be easily cut-to-fit with scissors

Roll Sizes:

25" x 48' x ½"
48" x 48' x ½"
25" x 36' x 1"
30" x 36' x 1"
48" x 36' x 1"
72" x 36' x 1"

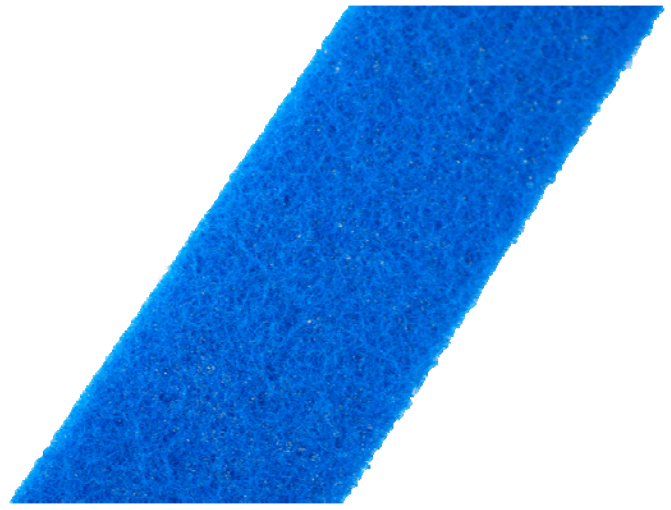

MODEL # PFLO1524-1/2
MODEL #PFLO2025-1
MODEL #PFLO2025-8PK
MODEL #PFLO1/2-ROLL25
MODEL #PFLO1/2-ROLL48
MODEL #PFLO1-ROLL25
MODEL #PFLO1-ROLL30
MODEL #PFLO1-ROLL48
MODEL #PFLO1-ROLL72

- Blue self-supporting rigid polyester fiber w/proprietary binder
- UL Classified as to Flammability Only
- Self Extinguishing -- FMVSS 302 Certified
- Available in ½" or 1" nominal thickness
- Product Weight: ½": 22.5 +/- 2.0 ounces per Square Yard; 1": 24.3 +/- 2.0
- Maximum operating temperature 200°F (use at 200°F can cause softening, prolonged use can cause media to become brittle)
- Initial air flow resistance - ½" 0.03 in. w.g.@1200 cfm; 1": 0.07 in. w.g.@1200 cfm
- Arrestance efficiency - ½": 70%; 1": 80%
- Dust Holding Capacity - ½": 316 grams; 1": 343 grams



www.permatron.com

1-800-882-8012